


MINI CUP HOLDERS WITH BUILT-IN SHUT-OFF VALVE

The distinctive feature of these cup holders, that share all the technical features of the other mini cup holders, is the built-in shut-off valve. Its function is to deactivate suction when the cup is not on the surface of the load to be lifted, in case of a defective grip or in presence of a considerable transpiration, thus preventing reduction of the vacuum level on the other cups of the plant that are regularly gripping a load. All this results in a great advantage, since, with this system, the placement or the exclusion of the non-gripping cups is no longer binding. Cups with diameters ranging from 10 mm to 50 mm can be assembled onto these cup holders, as long as they are equipped with a 1/8" gas threaded male support.

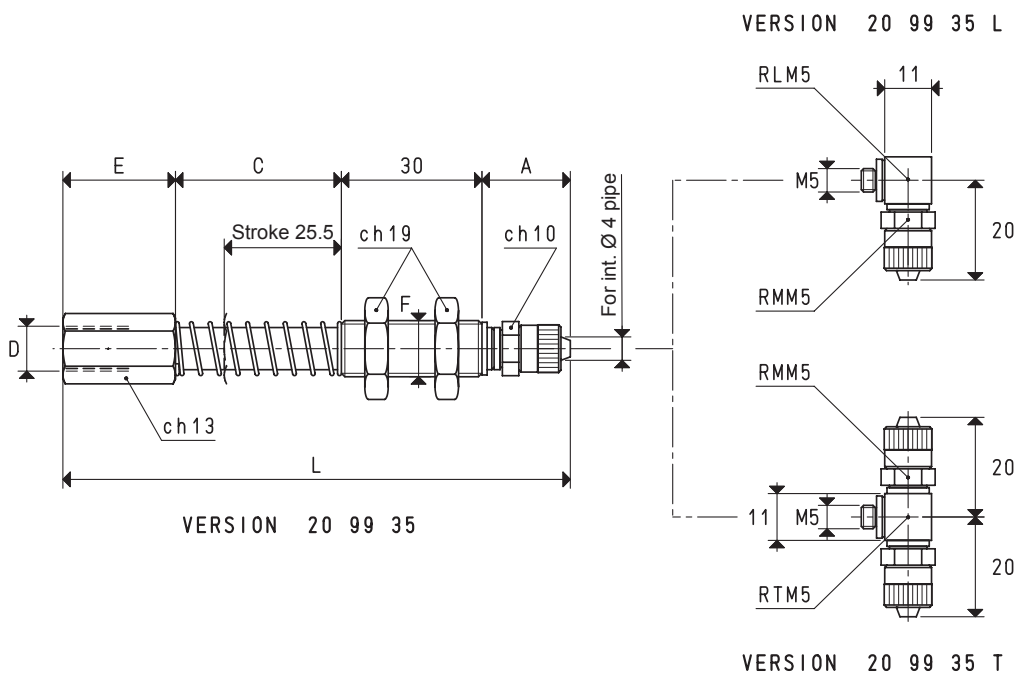

Art.	A	C	D Ø	E	F Ø	L	Weight g
20 99 35	17.5	35.5	G1/8"	24	M12 x 1.25	107	84

Conversion ratio: inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6}$ = $\frac{\text{Kg}}{0.4536}$