







FIXING SUPPORTS FOR SINGLE-STAGE VACUUM GENERATORS

The supports illustrated and described on this page are made in anodised aluminium as a standard but, upon request, they can be supplied in the stainless steel version. These supports are for fixing the multi-stage vacuum generators to the machine via a cylindrical slotted pin or a ball pin housed in the machine itself. They are suited for robotic gripping systems and they allow for easy vacuum generator installation on the profiles used in the automotive sector.




3D drawings are available on vuototecnica.net






Item	By generators	Material	Weight g
FCH 01	PVP 2	aluminium	60
	PVP 3		
FCH 01 INOX	PVP 2	stainless steel	180
	PVP 3		
	PVP 3		

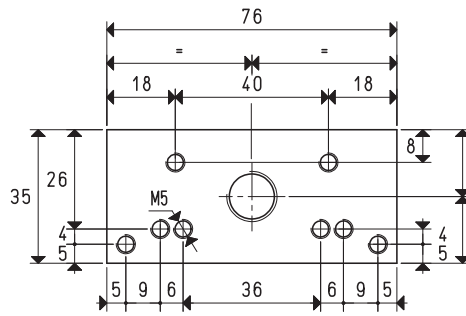

Item	By generators	Material	Weight g
FCH 02	15 01 10	aluminium	72
	15 02 10		
	15 03 10		
	15 04 10		
	15 05 10		
	15 06 10		
	15 07 10		
FCH 02 INOX	15 01 10	stainless steel	220
	15 02 10		
	15 03 10		
	15 04 10		
	15 05 10		
	15 06 10		
	15 07 10		

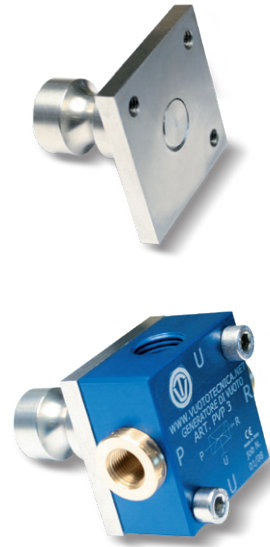

Item	By generators	Material	Weight g
FCH 03	PVP 2	aluminium	39
	PVP 3		
FCH 03 INOX	PVP 2	stainless steel	117
	PVP 3		

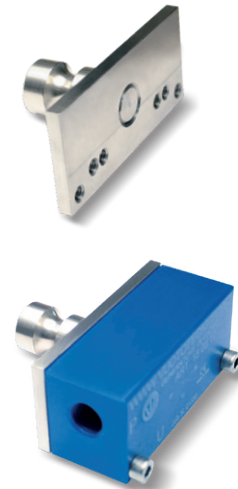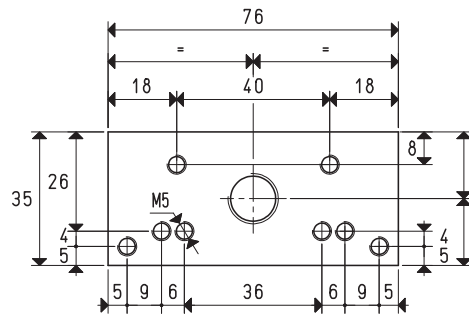

Item	By generators	Material	Weight g
FCH 04	15 01 10	aluminium	52
	15 02 10		
	15 03 10		
	15 04 10		
	15 05 10		
	15 06 10		
	15 07 10		
FCH 04 INOX	15 01 10	stainless steel	156
	15 02 10		
	15 03 10		
	15 04 10		
	15 05 10		
	15 06 10		
	15 07 10		

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

$$\text{inch} = \frac{\text{mm}}{25.4}; \text{pounds} = \frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$$