






MAXIGRIP CUP ACCESSORIES

In this page are described accessories for MAXIGRIP CUPS. The galvanised steel MF reduction is suited for all cups with female 1/4" gas thread connection and allows increasing it to 3/8" gas, always female.

The AQ adapters with square, flange and male and female thread connections are made with anodised aluminium and are suited for robotic gripping systems. They allow quick installation of the cups on the profiles used in the automotive sector.

The built-in seal guarantees perfect vacuum seal.

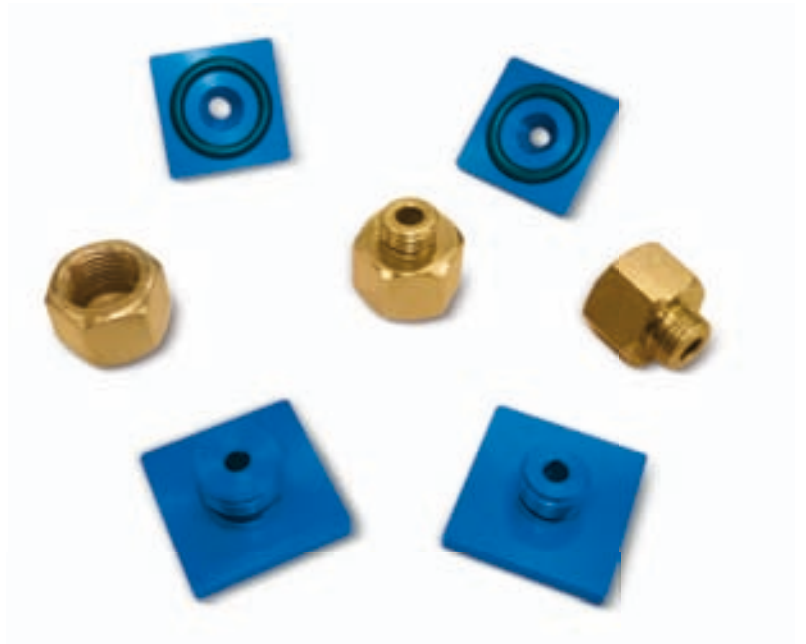

MF REDUCTIONS FOR VRP-VRS-VEP-VES CUPS

Art.	E	F	D	d	Ch	Reduction material	Weight g
00 08 208	15	9	G1/4"	G3/8"	22	steel	31

SQUARE REDUCTION FOR VRP-VRS-VEP-VES CUPS

Art.	H	E	F	D	d	Material	Weight g	Spare O-ring art.
AQ 32 1/8"	13	4.6	8.4	G1/8"	5	aluminium	11.8	00 08 214
AQ 32 1/4"	13	4.6	8.4	G1/4"	5	aluminium	13.2	00 08 214
AQ 32 3/8"	13	4.6	8.4	G3/8"	5	aluminium	15.6	00 08 214
AQ 32 1/2"	13	4.6	8.4	G3/8"	5	aluminium	17.2	00 08 214

SQUARE REDUCTION FOR VRP-VRS-VEP-VES CUPS

Art.	H	E	F	D	d	Material	Weight g	Spare O-ring art.
AQS 32 1/8"	16.1	4.6	11.5	G1/8"	5	aluminium	12.2	00 08 214
AQS 32 1/4"	20.0	4.6	15.4	G1/4"	5	aluminium	13.6	00 08 214
AQS 32 3/8"	20.0	4.6	15.4	G3/8"	5	aluminium	16.2	00 08 214
AQS 32 1/2"	20.0	4.6	15.4	G1/2"	5	aluminium	17.8	00 08 214

SQUARE REDUCTION FOR VRP-VRS-VEP-VES CUPS

Art.	H	E	F	D	d	Material	Weight g	Spare O-ring art.
AQ 32 1/4" F	17.9	4.6	13.3	G1/4"	11	aluminium	15.2	00 08 214
AQ 32 3/8" F	17.9	4.6	13.3	G3/8"	11	aluminium	14.1	00 08 214